

Series TC400

Rigid Dock Shelter

Loading Dock Seals & Shelters



FEATURES

- Services a wide range of vehicle traffic with varying widths and heights
- Rigid frame of either kiln-dried, pressure-treated lumber or steel-tube framing with raked header to permit drainage
- Complete with translucent covering to provide protection from the elements and admit light
- Provides near full access to interior of trailer
- Durapleat®(s) on the outer edge protect against tears
- Yellow guide stripes to assist positioning of trailers
- Flexible Scotchply® stays enable curtain to seal against trailer
- 2 added layers of fabric on side curtains reinforce bottom
- Foam bottom draft pads at each side help prevent air
- Flow into the loading dock area
- Steel bumper stops protects from misguided trailers
- Design and manufactured in the USA

SPECIFICATIONS

Dock shelters shall be model TC _____ as provided by McGuire®. Side and head curtain fabric to be _____ as specified. Side curtains to be reinforced with Max Flex™, multi-ply bottom panels, equipped with highly visible guide stripes. Head curtain shall have end and shall be stabilized by wind straps. Side curtain edges shall encase a continuous closed cell neoprene cord. The top section of the side curtain to include a full “Z” stay pattern. All curtains shall encase 3M “Scotchply®” stays (steel not acceptable) enclosed by multi-layer reinforcement sleeves. Stays to be spaced evenly with maximum of 14” O.C. in side curtains and a 20” maximum O.C. in head curtain.

Shelter shall consist of three rigid, select structural grade, pressure-treated wood frames, kiln dried before and after treating having translucent fiberglass secured to the exteriors, by the means of self-sealing wood screws




(staples not acceptable). The frame shall be assembled with screw shank nails and head frame with counter bored lag screws to maintain greater structural integrity. (Steel frames are optional.) The 2” x 6” head frame shall be sloped from center to provide for adequate drainage. Exterior frame corners shall be trimmed with aluminum angle. One pair of covered polyurethane foam bottom draft pads of 8” to 2” wedge design to be furnished per shelter. All hardware shall be galvanized steel. Unit shall include two factory painted 6” structural-steel channel guards.

TC400

OPTIONS

- BASIC FABRIC** (in a variety of colors):
 - Max Flex™ (heavy usage)
 - Truk Flex™ (heavy usage)
 - Rough Flex™ (medium usage)
 - 22oz Vinyl (medium usage)
 - 40oz Vinyl (medium/heavy usage)
- DURAPLEAT®**
 - Additional projections beyond 24” standard
 - Tapered units
 - Common member frames
 - Steel tube framing

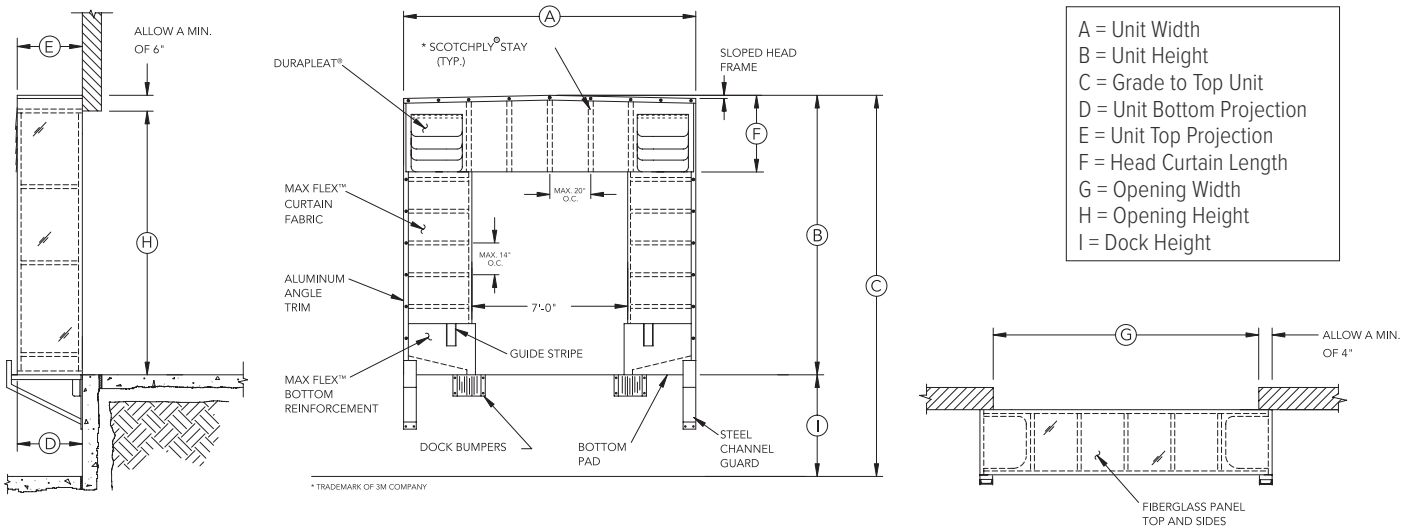

W194N11481 McCormick Dr. | Germantown, WI 53022
 wbm McGuire.com | sales@wbm McGuire.com
 800-624-8473



Designed, Engineered, and Manufactured in the U.S.A.
 © 2024 Systems, LLC/McGuire
 Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

