

Series TC900

Soft-Sided DockShelter

Loading Dock Seals & Shelters



FEATURES

- Services a wide range of vehicles with varying widths and heights
- Foam-side members eliminate wood and fiberglass side frames
- Integral structural supported head member is translucent to allow light and raked for drainage
- Provides near full access to interior of trailer
- Durapleat®(s) on the outer edge protect against tears
- Flexible Scotchply® stays enable curtain to seal against trailer
- 2 added layers of fabric on side curtains reinforce bottom
- Yellow guide stripes to assist positioning of trailers
- Foam bottom draft pads at each side help prevent air flow into the loading dock area
- Wide selection of highly durable fabrics and wear surfaces to maximize durability
- Design and manufactured in the USA

SPECIFICATIONS



Dock shelters shall be Series TC _____ as provided by McGuire®. Each unit shall be designed to accommodate an opening size up to _____ wide x _____ high; having a _____" dock height; equipped with _____" projection dock bumpers and a level drive approach. Unit shall be designed to service vehicles ranging in height from _____ to _____. Each unit shall be constructed having the following minimum dimensions: 12'-0" wide x 11'-0" high x 18" projection.

Side curtains shall be reinforced with multi-ply bottom panels, equipped with a highly visible guide stripe. Side curtains shall be attached to and removable from the foam side frames by the means of corrosion resistant, locking fasteners that engage factory installed threaded studs. Head curtain shall include overlapping pleats at each end. Side curtain edges shall encase a continuous closed cell neoprene cord. The top section of each side curtain to include a full Z stay pattern. All curtains shall encase 3M Scotchply® stays enclosed by multilayer reinforcement sleeves. Stays with a maximum of 16" O.C. in side curtains and a 20" maximum O.C. in head curtain.



Shelter shall consist of (2) fabric covered polyurethane foam side frames, which are to be chemically welded to a 2" thick, pressure-treated, kiln dried before and after treating (KDAT) wood frame. At the point

- A = Unit Width
- B = Unit Height
- C = Unit Top Projection
- D = Unit Bottom Projection
- E = Head Curtain Length
- F = Dock Height
- G = Opening Width
- H = Opening Height

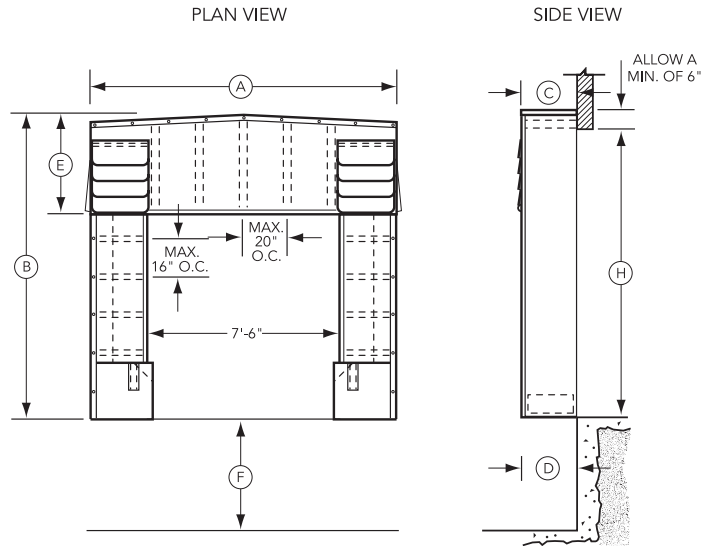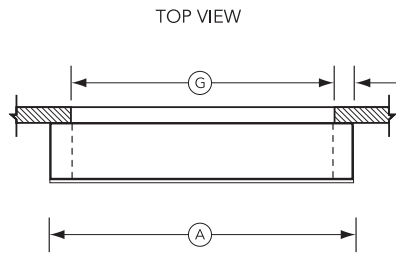

of attachment, the stay shall be through bolted to the polypropylene through the grommetted fabric and the stay.

Shelter shall include (1) rigid head frame constructed of select structural grade, pressure-treated lumber, kiln dried before and after treating, having translucent fiberglass secured to the exterior by the means of self sealing wood screws (staples not acceptable). The 2" x 6" head frame shall be sloped from center for drainage. Exterior head frame corner to be trimmed with aluminum angle that shall be through bolted to the frames, through the aluminum trim, grommetted fabric and the stay. (Lag screw attachment not acceptable).

One pair of covered foam bottom draft pads of an 8" to 2" wedge design, to be furnished per shelter. All hardware shall be galvanized steel.

TC900

OPTIONS

BASIC FABRIC *(in a variety of colors):*

- Max Flex™ (heavy usage)
- Truk Flex™ (heavy usage)
- Rough Flex™ (medium usage)
- 22oz Vinyl (medium usage)
- 40oz Vinyl (medium/heavy usage)

DURAPLEAT®

- Additional projections beyond 18" standard
- Tapered units

W194N11481 McCormick Dr. | Germantown, WI 53022
wbmcguire.com | **sales@wbmcguire.com**
 800-624-8473



Designed, Engineered, and Manufactured in the U.S.A.
 © 2024 Systems, LLC/McGuire
 Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

