

iDock® Alert Light Communication System



FEATURES

- Advanced 3-color light communication system
- Interactive message display with notifications, system information, maintenance history and more
- Raised dome button design for reliable ease of use
- Fault code display and internal led lights for easy troubleshooting
- Optional sensors for counters of equipment usage and dock activity
- Activation of lights automatically with optional solid state sensor
- Clear red and green lights provide immediate and recognizable direction to drivers and loading dock staff
- High visibility exterior caution signs

Connect online with

myQ®
Enterprise

* iDock Alert controls shown with optional dock light button.


iDock® Alert Light Communication System



Upgrade to iDock Controls with optional integrated equipment for a more efficient loading dock.



Exterior lights are standard with LED for extended life. One light shows a red X and a green circle for color-impaired individuals.

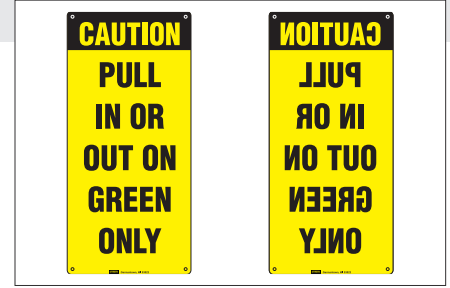

A set of standard and mirrored image caution signs notifies truck driver.

The iDock™ Alert Light Communication System is an enhanced version of McGuire's simple Dock Alert and provides a reliable warning system that establishes a clear line of communication between truck drivers and dock personnel, thereby reducing the risk of accidents at the loading dock.


As a truck approaches the dock, exterior lights will flash green while interior lights are red. Once the truck is in position, the dock attendant will open the overhead door, secure the trailer with an optional restraint, and raise the leveler onto the trailer. This action will trigger one of the installed sensors to automatically change the exterior light to red, letting the driver know not to pull away, and interior light to green, indicating that it's safe to proceed with loading/unloading.

iDock Alert is also equipped with the advanced features that iDock Controls have to offer, including an interactive message display, an adjustable 3-in-1 LED light assembly for a clear indication of the dock conditions, and dome button technology for a reliable ease of use. The message display on the controls will provide fault notifications, as well as a menu with equipment information and maintenance history.

Additionally, iDock Alert can have optional sensors installed at the loading dock to track equipment usage and dock activity. There is also an optional fixed field proximity switch for door interlock.

TECHNICAL SPECIFICATIONS

- Power Consumption:**
0.08 Amps @ 120 Volts AC (Controller)
0.06 Amps @ 120 Volts AC (Exterior LED)
- Bulbs:**
LED
- Exterior Lens Diameter:**
4 1/4"
- Dimensions:**
Standard Control Box - 14"H x 12"W x 8"D
Exterior Lights - 7.25"H x 6"W x 2.5"D
- Shipping Weight:**
25 lbs.

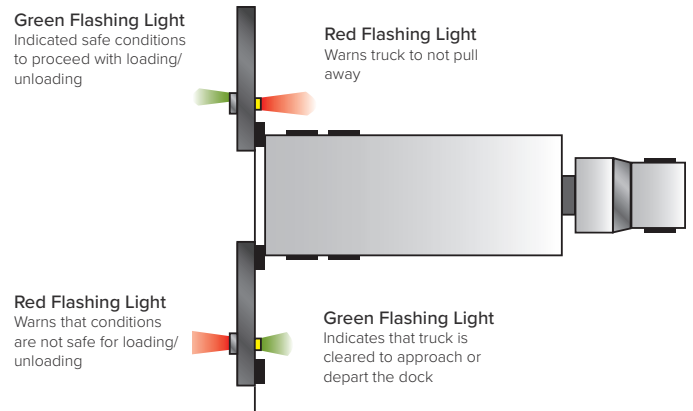

W194N11481 McCormick Dr. | Germantown, WI 53022
wbmcguire.com | sales@wbmcguire.com
800-624-8473



wbmcguire.com

Designed, Engineered, and Manufactured in the U.S.A.
© 2024 Systems, LLC/McGuire
Consistent with our policy of continuing product improvement, we reserve the right to change product specifications without notice or obligation.

